


# Adding 3-Way Switching to Treatlife DS01 Dimmer


In order to add the ability to switch the dimmer from another switch, we can add a couple of wires a to the TYWE3S chip inside the DS01 dimmer.



## Wiring

I chose to use GPIO-12 and GND.

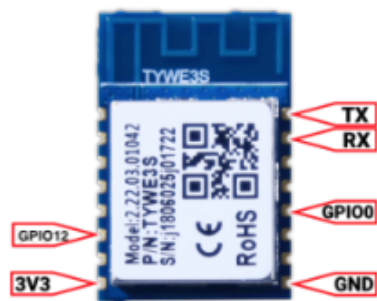


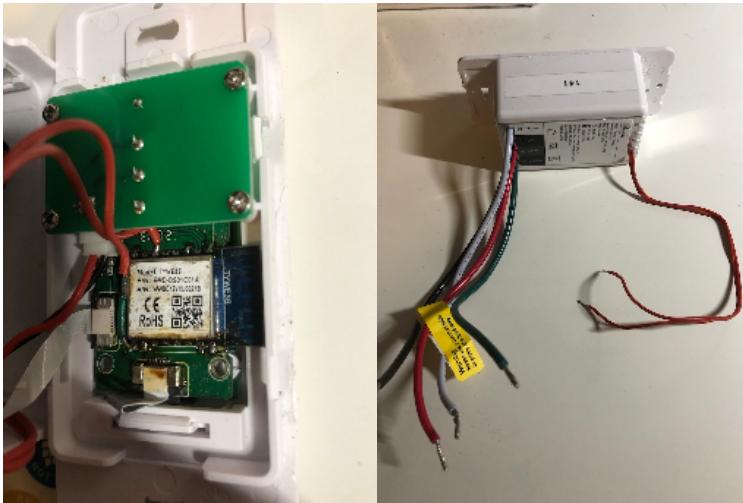

Wires were soldered onto GPIO-12 and GND and run through the back of the box.

## Configuring

Configure GPIO-12 as Switch(9) in the module configuration of Tasmota.

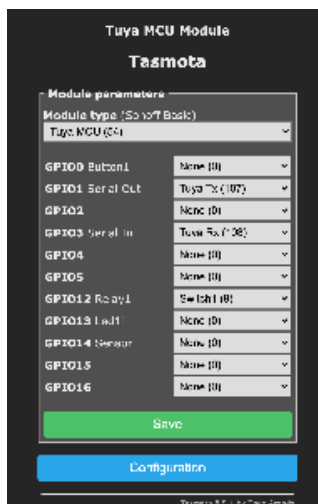

From the console, add the following rule:

```
Rule1 on switch1#state do power toggle endon
Rule1 1
```

Now when you connect or disconnect the two wires (GPIO-12 and GND), the dimmer will toggle power.

## References

Reference	URL
Tasmota Rules	<a href="https://tasmota.github.io/docs/Rules/">https://tasmota.github.io/docs/Rules/</a>