

Fresh Tomato Router Settings


- [NAT Settings](#)
- [Firewall Rules](#)

NAT Settings

To get remote IP addresses to pass through to proxy:

- Navigate to Advanced Firewall and set NAT settings to:

NAT loopback	All
NAT target	SNAT

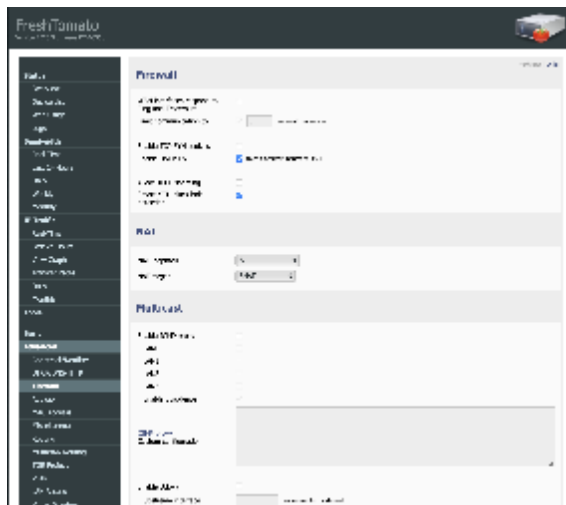

Firewall Rules


To have internal clients redirected to internal ip when they request the public ip, you can add the following rules to the firewall script by following these steps:

- Navigate to Administration Scripts
- select the Firewall tab and add the following rule:

```
iptables -t nat -A PREROUTING -i br0 -s 192.168.1.0/24 -d 206.80.251.217 -j DNAT --to 192.168.1.50
iptables -t nat -A POSTROUTING -o br0 -j SNAT
```

FreshTomato

Version 2023.3 on Asus RT-AC56U



Status

Overview

Devices List

Web Usage

Logs

Bandwidth

Real-Time

Last 24 Hours

Daily

Weekly

Monthly

IP Traffic

Real-Time

Last 24 Hours

View Graphs

Transfer Rates

Daily

Monthly

Tools

Basic

Advanced

Port Forwarding

Access Restriction

QoS

Bandwidth Limiter

Captive Portal

Web Server

USB and NAS

Scripts

mihaero | Wiki

Init

Halt

Firewall

WAN Up (main)

MultiWAN Up

```
iptables -t nat -A PREROUTING -i br0 -s 192.168.1.0/24 -d 206.80.251.217 -j DNAT --to 192.168.1.50
iptables -t nat -A POSTROUTING -o br0 -j SNAT
```

☐ Word Wrap

Notes

- For **MultiWAN Up**, the active WAN number is passed as **\$1**.

Save

Cancel